

Key Features

Easy Maintenance



Real-Time Remote Monitoring

When an alarm occurs, an e-mail notification is sent using SuperSign C or SI SW through the SNMP Protocol. In case of malfunctions or errors, real-time remote care is available.



Dust & Humidity Protection

The conformal coating enhances circuit board reliability by protecting it from dust, iron shavings, humidity and other harsh conditions.



Convenient Screen Mode



Aspect Ratio Sustainability*

Sustain the same resolution and picture quality while powering on/off by receiving EDID¹⁾ through switch IC.



- 1) Extended Display Identification Data.
- * Installation Menu > LG Digital Signage > PM Mode

Stand-by Screen*

Even without signal from the media player, the network does not turn off completely, so remote control is possible, which prevents unnecessary power usage and enables efficient management.



Scheduled Screen Wash**

Prevent residual images with the screen transition feature.



** Installation Menu > ISM Method




Increase the Efficiency of Display Maintenance



Screen Size

22



• Brightness : 450cd/m²

• Bezel: Top / Right / Left 18.9mm (Bottom 26mm)

Depth: 35.6mmOPS CompatibilityWi-Fi Dongle Ready


• Interface : HDMI / DP / DVI / RGB / RJ45 / USB 2.0(2) /

Pixel Sensor / RS232C

NPS 24m ≥ SUPERSIGN"

Specification	ons	32SL5B
PANEL	Screen Size	32"
	Panel Technology	IPS
	Aspect Ratio	16:9
	Native Resolution	1,920 x 1,080 (FHD)
	Brightness	450cd/m ²
	Contrast Ratio	1,300:1
	Dynamic CR	500,000:1
	Viewing Angle (H x V)	178 x 178
	Surface Treatment	Hard coating (2H), Anti-Glare Treatment of the Front Polarizer (Haze 1%(Typ.))
	Guaranteed Operating Hour	24 Hours
	Orientation	Portrait & Landscape
CONNECTIVITY	Input	HDMI, DP, RGB, DVI, Audio, USB 2.0(2)
	Output	DVI, Audio, External Speaker Out
	External Control	RS232C(In/Out), RJ45, Pixel Sensor (Optional)
PHYSICAL SPECIFICATION	Bezel Color	Black
	Bezel Width	18.9mm (T/R/L), 26mm (B)
	Monitor Dimension (W x H x D)	740.4 x 442 x 35.6mm
	Weight (Head)	8.0kg
		о.vк <u>у</u>
	Monitor with Optional Stand Dimension (W x H x D)	740.4 x 498.0 x 301.9mm
	Weight (Head + Stand)	8.8kg
	Monitor with Optional Stand & Speaker Dimensions (W x H x D)	740.4 x 498.0 x 301.9mm
	Weight (Head + Stand + Speaker)	9.6kq
	Carton Dimensions (W x H x D)	850 x 585 x 121mm
	Packed Weight	9.9kg
	VESA™ Standard Mount Interface	200 x 200
SPECIAL FEATURES		USB Content Scheduling, Conformal Coating, SNMP Support, Wi-Fi Ready (Dongle), Power Management Modes (Sustain Aspect Ratio/Stand-by Screen, etc.), No Signal Image Setting, Enhanced ISM (Image Sticking Minimization)Mode Holiday Schedule/Local Time Auto Setting, Fail-over (USB, RGB, DVI, HDMI), Wake on LAN
NVIRONMENTAL	Operating Temperature Range	0 °C to 40 °C
CONDITIONS	Operating Humidity Range	10 % to 80 %
POWER	Power Supply	100-240V-, 50/60Hz
	Power Type	Built-In Power
	Power Typ.	65W
	Consumption Smart Energy Saving	42W
STANDARD (CERTIFICATION)	Safety	UL / cUL / CB / TUV / KC
	EMC	FCC Class "A" / CE / KCC
	ErP / Energy Star	Yes / Yes (Energy Star 6.0)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	Yes
	External Media Player Attachable	No
SOFTWARE COMPATIBILITY	SuperSign-W/Lite	Yes
	SuperSign-C	Yes
ACCESSORY	Basic	Remote Controller (2 batteries included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender
	Optional Accessory	Speaker (SP-2100), Stand (ST-320T), Wall bracket (LSW200), OPS Kit (KT-0PSA)

Dimension (unit : mm) 32" 740.4 × 442 × 35.6 / 8.0kg 740.4 18.9 18.9 18.9 18.9 18.9 102.25 11 102.25 11 103.16 165.84

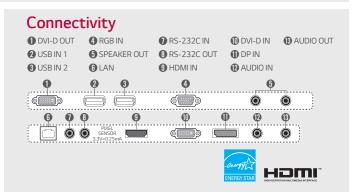

Download LG Commercial Display Mobile App





More info www.lgecommercial.com
You Tube youtube.com/c/LGECommercialDisplay



