
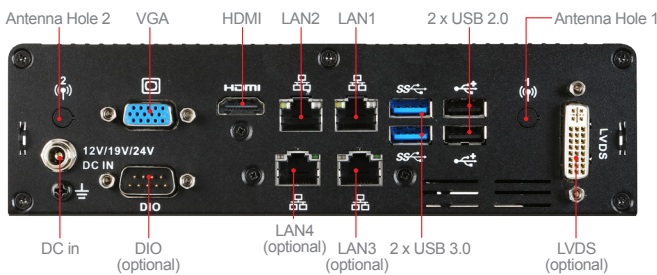


MS-9A69

Compact-size Ultra Low-power Fanless System with Intel® BDW ULT or Bay Trail-D Series Platform

Coming Soon

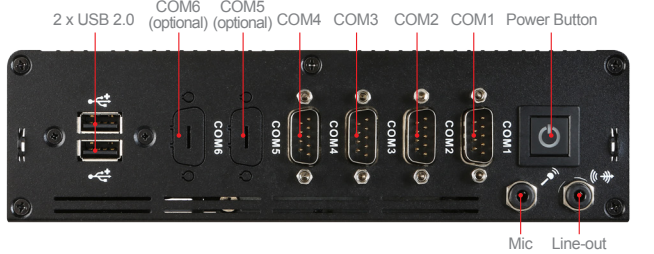

Features

- Ultra low power with fanless design
- Support DDR3L 1333/1600 MHz SO-DIMM memory up to 8GB
- Support 2 or 3 independent displays with HDMI, VGA, and LVDS (BDW only)
- Dual GbE LAN, rich USB and COM ports
- Dual Mini-PCIe for expansion
- Support DC-in 12V/19V/24V

Ordering Information

Part Number	Description
Coming soon	

Packing List

Part Number	Description
Coming soon	

Specifications

System Processor	CPU	Intel® Celeron® Processor BayTrail J1900, Quad Core	Intel® BDW ULT Core™ i3-5010U Processor, Dual Core
	Frequency	2 GHz	2.1 GHz
	L2 Cache	2MB	3MB
	CPU Type	BGA	BGA
	Chipset	N/A	N/A
BIOS		AMI	
Memory	Technology	Single-channel DDR3L 1333 MHz	Single-channel DDR3L 1600 MHz
	Max. Capacity	Up to 8GB	
	Socket	1 x 204-pin SO-DIMM	
Graphic	Controller	Intel® HD Graphics	
	Graphic Memory	Shared system memory up to 1.7 GB SDRAM	
	Multiple Display	2 independent displays	3 independent displays
	Display Interface	VGA up to 1920 x 1200 HDMI up to 1920 x 1080 LVDS up to 1920 x 1200 (optional)	
Ethernet	Controller	2 x Intel® I210-AT GbE LAN	1 x Intel® I210-AT GbE LAN 1 x Intel® I218-LM GbE LAN PHY
	Audio	Controller	Realtek® ALC887-VD2-CG HD Audio Codec
H/W Monitor	Watchdog Timer	256-level Watchdog Timer	
TPM	Controller	N/A	
Expansion Slot	Mini-PCIe	2 x Full-size (one w/ mSATA)	1 x Full-size (w/ mSATA) 1 x Half-size
	Storage	SATA	1 x 2.5" HDD/SSD
I/O Interface	mSATA	1	
	RJ-45	4	
	Audio	1 x Mic-in 1 x Line-out	
	USB	1 x USB 3.0 5 x USB 2.0	2 x USB 3.0 4 x USB 2.0
	Serial	6 x COM ports COM1: RS-232/422/485, 0V/5V/12V COM2-6: RS-232, 0V/5V/12V	4 x COM ports COM1: RS-232/422/485, 0V/5V/12V COM2-4: RS-232, 0V/5V/12V
	HDMI	1	
	LVDS	1 (optional)	
	DVI	N/A	
	DisplayPort	N/A	
	VGA	1	
Power Supply	Antenna	2 openings reserved for antennas	
	DC Input	DC-in 12V/19V/24V	
Environment	AC Input	N/A	
	Operating Temperature	-10 ~ 45°C (HDD) -10 ~ 50°C (SSD or mSATA)	
	Operating Humidity	10 ~ 90%, non-condensing	
	Storage Temperature	-20 ~ 80°C	
	Storage Humidity	10 ~ 90%, non-condensing	
Physical characteristics	Vibration	Operating, 0.25 Grms, 5-300Hz, 3axes (w/ HDD)	
	Shock	Operating, 3 G, half sine 11 ms duration (w/ HDD)	
Certification	Dimensions	200mm x 150mm x 55mm	
	Weight	1.80 kg	
	Mounting	Wall mount/VESA mount/DIN-rail mount	
Software Platform	EMC	FCC, CE, C-Tick, VCCI, BSMI	
	Safety	BSMI	
OS Support	Windows 7 (32/64-bit), Windows 8.1 (32/64-bit)		