


MS-98F6

Intel® Bay Trail-D/M Series Platform in 3.5" SBC Fanless Design for Low Power and High-performance Solution

NEW

Specifications

Processor	CPU	Intel® Celeron® Processor J1900/N2930, Quad Core
	Frequency	2 GHz (Quad Core, for J1900) 1.83 GHz (Quad Core, for N2930)
	L2 Cache	2MB
	CPU Type	BGA
	Chipset	N/A
Memory	BIOS	AMI
	Technology	Single-channel DDR3L 1333 MHz
	Max. Capacity	Up to 8GB
Display	Socket	1 x 204-pin SO-DIMM
	Controller	Intel® HD Graphics
	Graphic Memory	Shared system memory up to 1.7 GB SDRAM
	LVDS	Dual channel 18/24-bit
	eDP	N/A
	VGA	1
	DVI	N/A
	HDMI	1
	DisplayPort	N/A
	Multiple Display	2 independent displays
Ethernet	Display Interface	VGA up to 2560 x1600 HDMI up to 1920 X1080 LVDS up to 1920 x 1200
	Controller	2 x Intel® I210-AT GbE LAN
Audio	Controller	Realtek® ALC887-VD2-CG HD Audio Codec
Super I/O	Controller	Fintek F81866AD-I
H/W Monitor	Watchdog Timer	256-level Watchdog Timer
	Smart Fan	N/A
TPM	Controller	N/A
I/O Interface	USB	7 x USB 2.0 (4 x internal; 3 x rear) 1 x USB 3.0 (1 x rear)
	Serial	6 x COM (internal) COM1: RS-232/422/485, 0V/5V/12V COM2-6: RS-232, 0V/5V/12V
	Parallel	N/A
	PS/2	1 (wafer connector)
	GPIO	8-bits (4 x GPI; 4 x GPO), 5V
	PCIe x16	N/A
Expansion Slot	PCIe x4	N/A
	PCIe x1	N/A
	PCI	N/A
	Mini-PCIe	2 x Full-size (one w/ mSATA)
Storage	SATA	1 x SATA 2.0
	IDE	N/A
	eSATA	N/A
	CFast	N/A
	mSATA	1
	CompactFlash	N/A
Power Supply	DC	DC-in 12V/19V/24V
	ATX	N/A
Environment	Operating Temperature	-10 ~ 60°C
	Operating Humidity	10 ~ 90%, non-condensing
	Storage Temperature	-20 ~ 80°C
	Storage Humidity	10 ~ 90%, non-condensing
Form Factor	Dimensions	146mm x 102mm (3.5")
	Weight	0.31 kg
Certification	EMC	FCC, CE, C-Tick, VCCI, BSMI

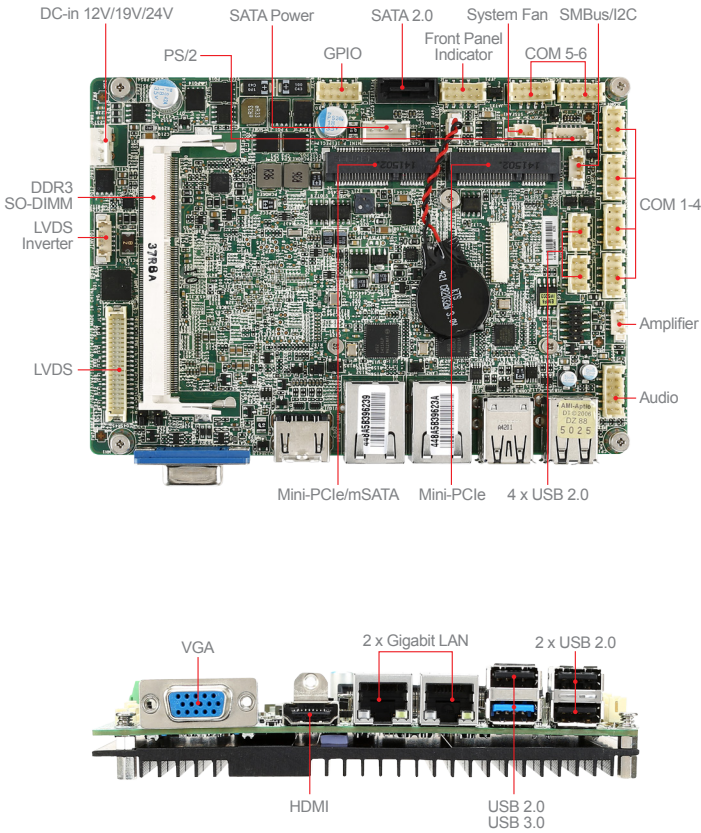

Features

- Intel® Bay Trail-D/M Series Processor
- DDR3L 1333 MHz SO-DIMM Memory up to 8GB
- HDMI, VGA and LVDS Displays
- Dual GbE LAN, USB 3.0 and 6 COM
- Support Dual Mini-PCIe and SATA and mSATA

Ordering Information

Part Number	Description
919-98F6-003	MS-98F6 11 Intel Bay Trail D-J1900,DDR3L SO DIMM+VGA+HDMI+LVDS+2*Mini-PCIe+2*LAN+ 1*SATA2.0+1*USB3.0+7*USB 2.0+6*COM,DC 12V/19V/24V
919-98F6-004	MS-98F6 11 OPT:A Intel Bay Trail M-N2930,DDR3L SO DIMM+VGA+HDMI+LVDS+2*Mini-PCIe+2*LAN+ 1*SATA2.0+1*USB3.0+7*USB 2.0+6*COM,DC 12V/19V/24V

Packing List

Part Number	Description	Quantity
G71-SEDC126-X03	Driver DVD	1
K10-3002145-V03	DC Power Cable, 120mm	1
K14-1009062-V03	COM Port Cable, 250mm	1
K1B-3008034-V03	USB Cable, 150mm	1
K1D-1012064-V03	SATA Cable with Power, 200mm	1