


# MS-98H6

Pico-ITX SBC with Intel® Braswell N3000 Series SoC Platform for Low-Power and Fanless Solution

NEW

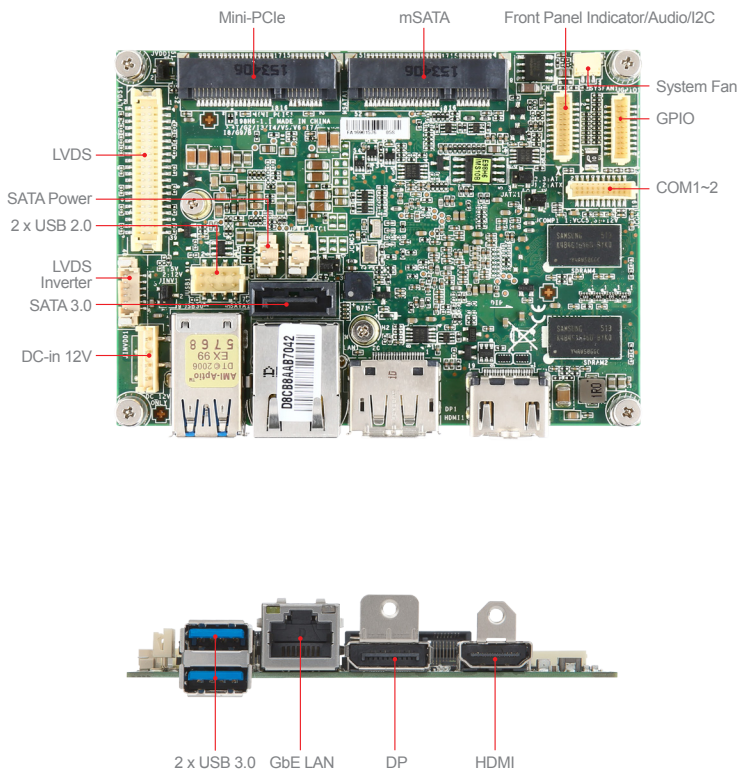

## Features

- Intel® Braswell N3000 Series SoC
- Onboard 2GB DDR3L memory
- 3 independent displays with HDMI, DP, and LVDS outputs
- 1 SATA 3.0, 1 mSATA (Full-size), 2 USB 3.0 & 2 USB 2.0 ports, 1 Mini-PCIe (Half-size), 1 Intel® GbE LAN
- 16-bit GPIO (8\*GPI; 8\*GPO), I2C
- 2 COM ports

## Ordering Information

Part Number	Description
919-98H6-004	Intel Braswell N3710 SoC, Onboard 2GB DDR3L, HDMI, DP, GbE LAN, 2*USB3.0, 2*COM, Mini-PCIe, mSATA, I2C, DC-IN 12V,SATA CABLE WITH POWER,USB CABLE,COM PORT CALBE,DC-IN CABLE,CD,SINGLE
919-98H6-005	Intel Braswell N3160 SoC, Onboard 2GB DDR3L, HDMI, DP, GbE LAN, 2*USB3.0, 2*COM, Mini-PCIe, mSATA, I2C, DC-IN 12V,SATA CABLE WITH POWER,USB CABLE,COM PORT CALBE,DC-IN CABLE,CD,SINGLE
919-98H6-006	Intel Braswell N3010 SoC, Onboard 2GB DDR3L, HDMI, DP, GbE LAN, 2*USB3.0, 2*COM, Mini-PCIe, mSATA, I2C, DC-IN 12V,SATA CABLE WITH POWER,USB CABLE,COM PORT CALBE,DC-IN CABLE,CD,SINGLE

## Packing List

Part Number	Description	Quantity
K14-3018001-V03	COM PORT Cable, 150mm	1
K1B-3008034-V03	USB Cable, 150mm	1
K1D-3010008-V03	SATA Cable with Power, 150mm	1
K1G-3004057-V03	DC Power Cable, 150mm	1
G71-SEDC149-X03	Driver DVD	1

## Specifications

<b>Processor</b>	CPU	Intel® Pentium® processor N3710, QC, 6W Intel® Celeron® processor N3160, QC, 6W Intel® Celeron® processor N3010, DC, 4W
	Frequency	N3710, 1.6 GHz up to 2.56 GHz N3160, 1.6 GHz up to 2.24 GHz N3010, 1.04 GHz up to 2.24 GHz
	L2 Cache	2MB
	CPU Type	BGA
	Chipset	Integrated in SoC
<b>Memory</b>	BIOS	AMI
	Technology	Single-channel DDR3L 1600MHz
	Max. Capacity	Onboard 2 GB
	Socket	Onboard
<b>Display</b>	Controller	Intel® HD Graphics
	Graphic Memory	Shared system memory up to 1.7 GB SDRAM
	LVDS	Dual Channel 18/24-bit
	HDMI	1
	DisplayPort	1
	Multiple Display	3 independent displays
	Display Interface	LVDS up to 1920 x 1200 @ 60 Hz, HDMI up to 2560 x 1600 @ 60 Hz, 3840 x 2160 @ 30 Hz DP1.1a up to 2560 x 1600 @ 60 Hz, 3840 x 2160 @ 30 Hz
<b>Ethernet</b>	Controller	1 x Intel® I211-AT GbE LAN
<b>Audio</b>	Controller	Realtek® ALC887-VD2-CG HD Audio Codec
<b>Super I/O</b>	Controller	Fintek F81866AD-I
<b>H/W Monitor</b>	Watchdog Timer	256-level Watchdog Timer
	Smart Fan	Yes
<b>TPM</b>	Controller	N/A
<b>I/O Interface</b>	USB	2 x USB 2.0 (2 x internal) 2 x USB 3.0 (2 x rear)
	Serial	2 x COM (internal) COM1: RS-232/422/485, 0V/5V/12V COM2: RS-232/422/485, 0V/5V/12V
	GPIO	16-bits (8 x GPI; 8 x GPO), 5V
<b>Expansion Slot</b>	Mini-PCIe	1 x Half-size
<b>Storage</b>	SATA	1 x SATA 3.0
	mSATA	1
<b>Power Supply</b>	DC	DC-in 12V
	ATX	N/A
<b>Environment</b>	Operating Temperature	Heat-Spreader: 100(L) x 72.2(W) x 8(H) mm (standard packing) Heat-Sink: -10~60°C, 100(L) x 72.2(W) x 33(H) mm (by option)
	Operating Humidity	10 ~ 90%, non-condensing
	Storage Temperature	-20 ~ 80°C
	Storage Humidity	10 ~ 90%, non-condensing
<b>Form Factor</b>	Dimensions	100mm x 72mm (Pico-ITX)
	Weight	0.18 kg
<b>Certification</b>	EMC	FCC, CE, RCM, VCCI, BSMI
<b>Software Platform</b>	OS Support	Windows 7 (32/64-bit) Windows 8.1 (64-bit) Windows 10 (64-bit) Fedora 22 Ubuntu 14.04